




CORROSIVE ENVIRONMENT THERMOSTAT

FAST RESPONDING STAINLESS STEEL SENSOR RESISTS CORROSION

- › Designed to provide precise control of heating, cooling and ventilation systems
- › Stainless steel sensing coil and watertight ABS plastic enclosure
- › Adjustable dial allows it to be easily recalibrated

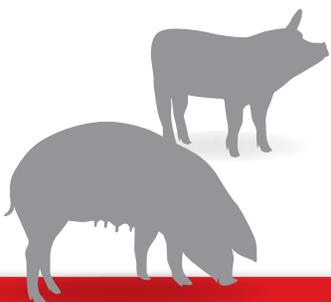

CORROSIVE ENVIRONMENT THERMOSTAT


The Corrosive Environment Thermostat from PigTek is designed to provide precise single-stage control of heating, cooling and ventilation systems.

What You Need to Know

- > This single-stage mechanical thermostat is designed for controlling ventilation and heating equipment in even the harshest of hog house environments.
- > A corrosion-resistant 316 Series stainless steel sensing coil is mounted on the side of the watertight ABS plastic enclosure.
- > Thermostat is simple to field calibrate for barn temperature accuracy.

Product Features


- > The single-stage thermostat has a water-resistant NEMA 4x enclosure that is resistant to high humidity and airborne contaminants as well as resistant to moisture and corrosive gases found in agricultural buildings.
- > The thermostat has a fast responding stainless steel sensor that resists corrosion and a 2.5 degree differential.
- > With a temperature range of 40 to 104 degrees Fahrenheit (4.44 to 40 C), the single-stage thermostats have simple calibration in field.

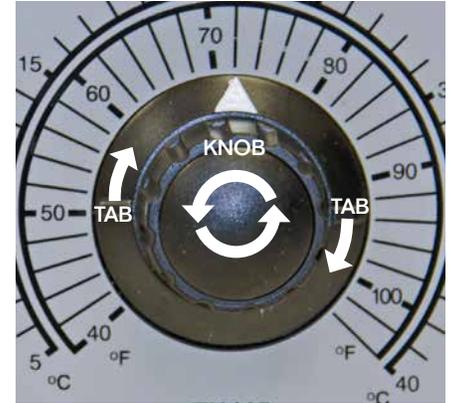

Single-Stage Mechanical Thermostat –
Fast responding stainless steel sensor resists corrosion.

Adjustable Knob allows for easy calibration of thermostat's temperature setting.

WIRING DIAGRAM:

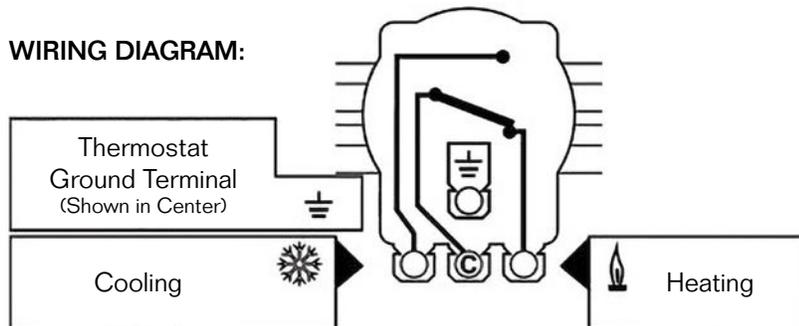

ELECTRICAL RATINGS

Volts A.C. 50/60 HZ	120V	240V
Full Load Amps (inductive)	12A	10A
Locked Rotor Amps	48A	36A
Full Load Amps (resistive)	16A	16A
Pilot Duty (VA/Watts)	125	125

Part No. PT1173

Dimensions:

5.25 x 4.5 (with coils) x 2.5 inches
[133.4 x 114.3 (with coils) x 63.5 mm]

Approx. Weight: 12 ounces (0.34 kg)

Individual Shipping Weight: 0.8 lbs (0.36 kg)

Made in The Netherlands

